

COUNTERTOP WATER PURIFIER

JL1844T



-  with the Indicator Light
-  Child Safety Lock
-  Electric control
-  Hot/Cold/Ambient Water
-  Lack of water protection
-  304 Stretched Stainless Cold Tank
-  Double safety device for preventing overheat
-  Water leakage detection
-  UV sterilization
-  Filter life time reminder



hot Water Ambient Water Cold Water




Different color indicator buttons,
easy to recognize

- Red for child lock and hot water
- Yellow for Ambient water
- Blue for cold water
- O3 and Filter life indicators

COUNTERTOP WATER PURIFIER(optional)

JL1844T

Product Introduction:

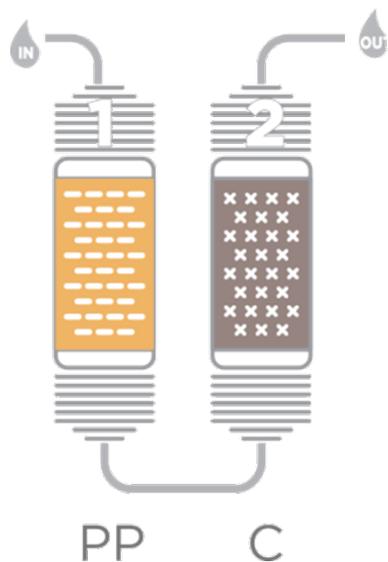

PP Filter



Carbon Block Filter





The third generation quick connection **One-touch filter**. Easy to replace.



COUNTERTOP WATER PURIFIER

Water leakage protection system

There is a water leakage protector at the bottom of the machine base, if there happens to be any leakage inside the machine, the water will gather at the pond and the foam will rising up to cut the water in-let.

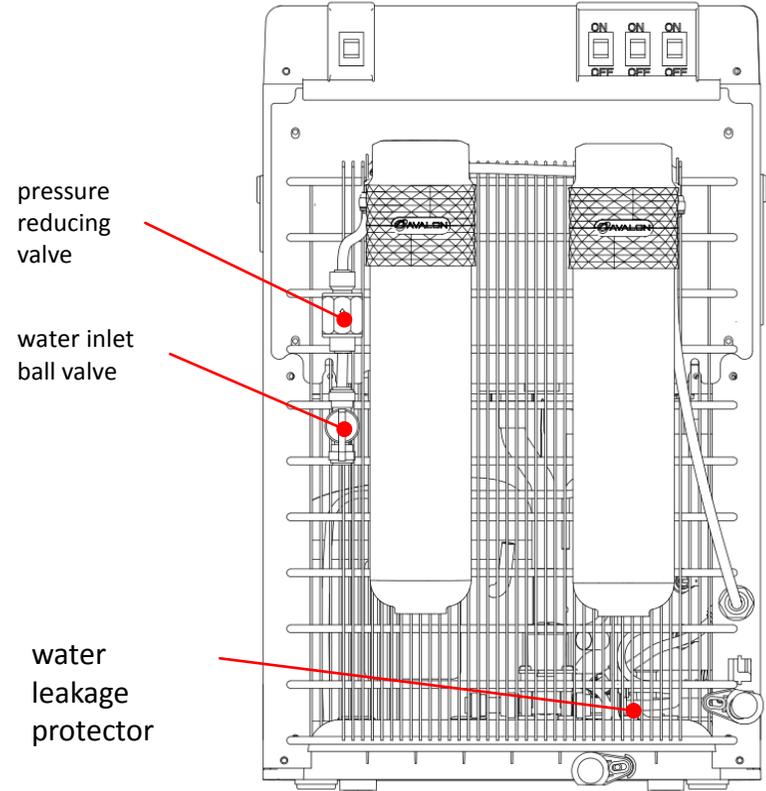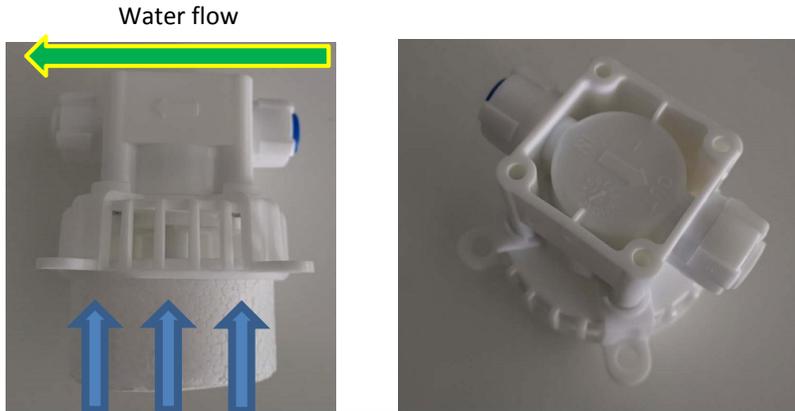



General Information	Factory Model No	JL1844T
	Color	Black/Stainless Steel
	Power Supply Voltage & Frequency (V/Hz)	110V/60HZ or 220V/60HZ
	Power Consumption	
	Purification Capacity (1t/day)	
	Total Water Tank Capacity (1t)	4.6L
	Cold Water Output	1.8L/min
	Ambient Water Output	1.5L/min
	Hot Water Output	1.8L/min
	Water Leakage Protection	YES
Filter Information	First Stage Filter & Life Time	PP Filter 3600L
	Second Stage Filter & Life Time	Pre Active Carbon Filter 3600L
Applicable Range	Pouvoir Hydrogène--PH	6.5~8.5 Alkalescence
	Applicable Environment	4~40°C Without Direct Sunshine
	Applicable Water Pressure	0.1~0.7 Mpa
	Feed Water Temperature	5~38°C
	Applicable Feed Water GB5749-2006	TDS≤350ppm
Purification Performance	particular removable	0.5μm
	Smell/Taste	NO Smell & Taste
	Visible object	No Visible object to naked eyes
	Chlorine Reduction	≥90%
	Colon Bacillus	≥99.99%

Cooling and Heating Performance	Cold Water Tank Capacity(1t)	3L
	Cooling Capacity(1t/hr)	2L/H
	Cold Water Temperature(° C)	≤10°C
	Cooling Power(W)	100W
	Hot Water Tank Capacity(1t)	1L
	Heating Capacity(1t/hr)	4L/H
	Hot Water Temperature(° C)	≥85°C
	Heating Power (W)	420W
	Compressor	R600
	Condenser Weight (kg)	1.1KG
Material and Dimension	Hot Tank Material	SUS304
	Cold Tank Material	SUS304
	Climate Class (T/ST/N)	ST/T
	Refrigerant	36g
	Top Cover Materials(ABS/PP/HIPS)	ABS
	Front Panel Materials (ABS/PP/HIPS)	ABS
	Side Panel Materials (ABS/PP/HIPS/Metal)	Metal
	Net Size	W310*D380*H485
	Packing Size	W360*D405*H690
	Weight (Net / Gross) (kg)	16/18
Certificate	Appliance Certificates	CB/UL/CE