



JL1645T-C

TABLE TOP WATER PURIFIER

JL1645T-C

PRODUCT DESIGN



Noti-Fine

TIMELY FILTER REPLACEMENT NOTIFIED, PURITY SUSTAINED

Clearly aware of your filters' lifespan and get timely notified of necessary filter replacement, to sustain the optimum purification performance, always ensuring quality in every drop and smoothing your drinking experience.



Filter Introduction of Each Stage



Visible Filter Lifespan on Your Smart Device



Mi-Report

ACQUIRE A HEALTHY HYDRATION HABIT

Get to know your water intake by viewing your Water Consumption Reports produced on a daily, weekly, monthly and yearly basis, simply on your smart device. Believe it or not, you will get encouraged by the figures and consciously try to develop a healthier water drinking habit, and we are with you on this journey to a good hydration.



Real-Time & Periodic Water Consumption Report



Learn Your Water Intake




FREESTANDING WATER PURIFIER


Post UV-sterilization :

Post-UV Sterilization

Post UV, kill bacteria just when you drink.
Microbes removal rate $\geq 99\%$

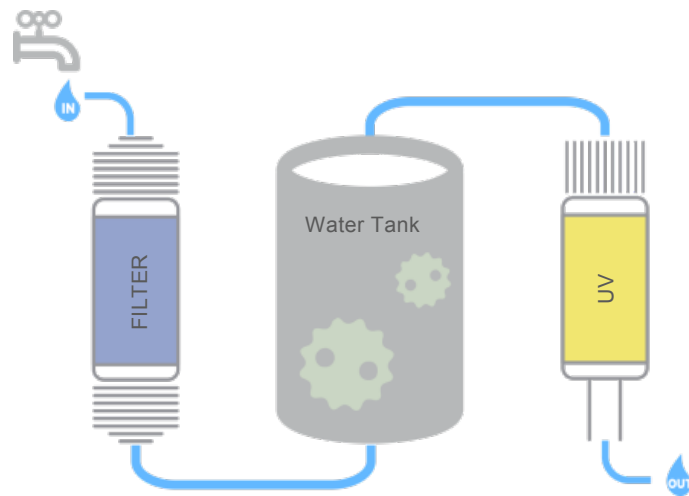

Bacterial grow in the water tank

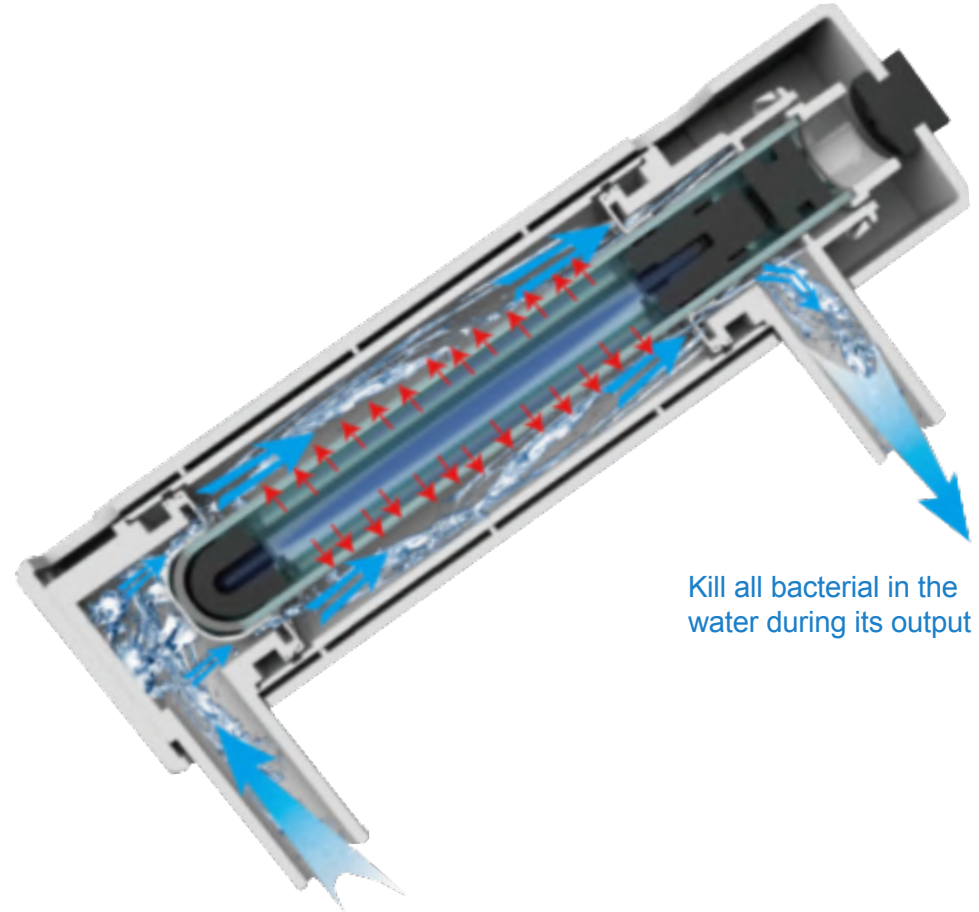


Kill all bacterial in the
water during its output


TABLE TOP WATER PURIFIER

JL1645T-CG

Features :

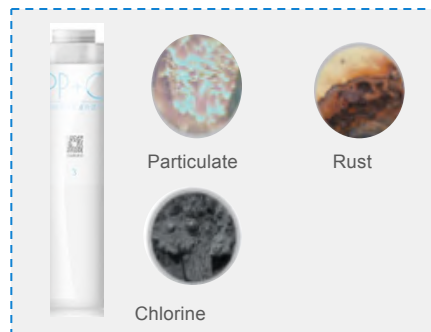

PP & Carbon filter

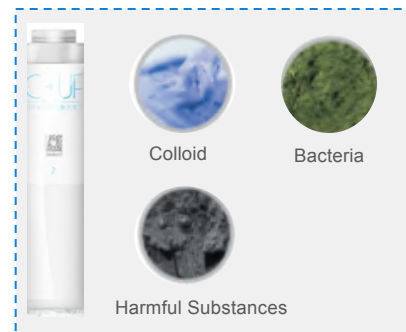

UF filter

- 1. 3 Temperature Selection
- 2. Filter life time reminder
- 3. Post UV Sterilize water just before you drink, **Absolutely Zero Bacteria**
- 4. **ECO Mode** automatically power off the heating system at night by SMART detector. Save 30% energy
- 5. **Fixed water volume** function. Set your hands free
- 6. One-touch filter. Easy to replace
- 7. PP & Carbon filter reduces odor, chlorine , smell
- 8. **UF filter reduce Colloid, Organism , bacteria**

1 ECO light sensor

2 ECO button

JL1645T-CG Product Specification:

| | |
|-------------------------------------|---|
| Product Color-颜色 | White /Black Color |
| Voltage | 220-240V~/ 50/60Hz 115V/60Hz |
| Rated power(W) | 555W |
| Working environment | 4°C-40°C , humidity≤90% |
| Inlet water | Municipal water |
| Inlet water pressure | 0.1~0.4 Mpa |
| Faucet Quantity | 1 |
| The flow out control | Solenoid valve |
| Volume selection button | Touch selection volume button and pressure button get set volume water. |
| Faucet water flow | 1.2L/min(depends on the water pressure) |
| Outer water | Ambient/Cold /Hot |
| Cooling system | compressor |
| Cooling Capacity(1t/hr) - 制冷能力 | ≥3L/H ≤10°C |
| Cold Water Tank Capacity(1t) - 冷罐容积 | 1.2L |
| Heating Capacity(1t/hr) - 加热能力 | 4L/H ≥85°C |
| Hot Water Tank Capacity(1t) - 热胆容积 | 0.8L |
| Ambient water tank | None |
| Filtration system | PP & CB +UF |
| Filtration class | 0.01μm |

| | |
|--|---|
| Filter structure | Quick connector |
| Filter lifetime | PP & CB Filter 3600L UF Filter 5400L |
| Filter life indication | Base one the user time and volume consumed |
| Filter size | KSM6 |
| UV lamp | YES |
| Product Dimensions (mm) 产品尺寸 | 435(D) * 425 (H) * 260(W) |
| Packing Dimensions (mm) 包装尺寸 | 514(D) * 510 (H) * 322(W) |
| N.W. (kg) 净重 | 14 |
| G.W. (kg) 毛重 | 15 |
| Container Loading Qty. (20'/40'GP/40'HQ) - 集装箱装箱量 | 308/644/805 |
| Certificate | CB\CE\UL |