

A1

UF filtration

(MU151-4)




Main features



- 4 stage ultra-filtration system, eliminate the particle, colloid, bacterial in water, while keep the mineral in the mean time
- DIY design, easy to change filters, with safety buckles
- Integrated water-route system reduce the leakage risk
- No need power to work, quite while working
- 1.2L/Min sufficient flow rate, quick to fill a glass
- Super slim size, saves the under sink space

PP+C+UF+C 4 stage filters

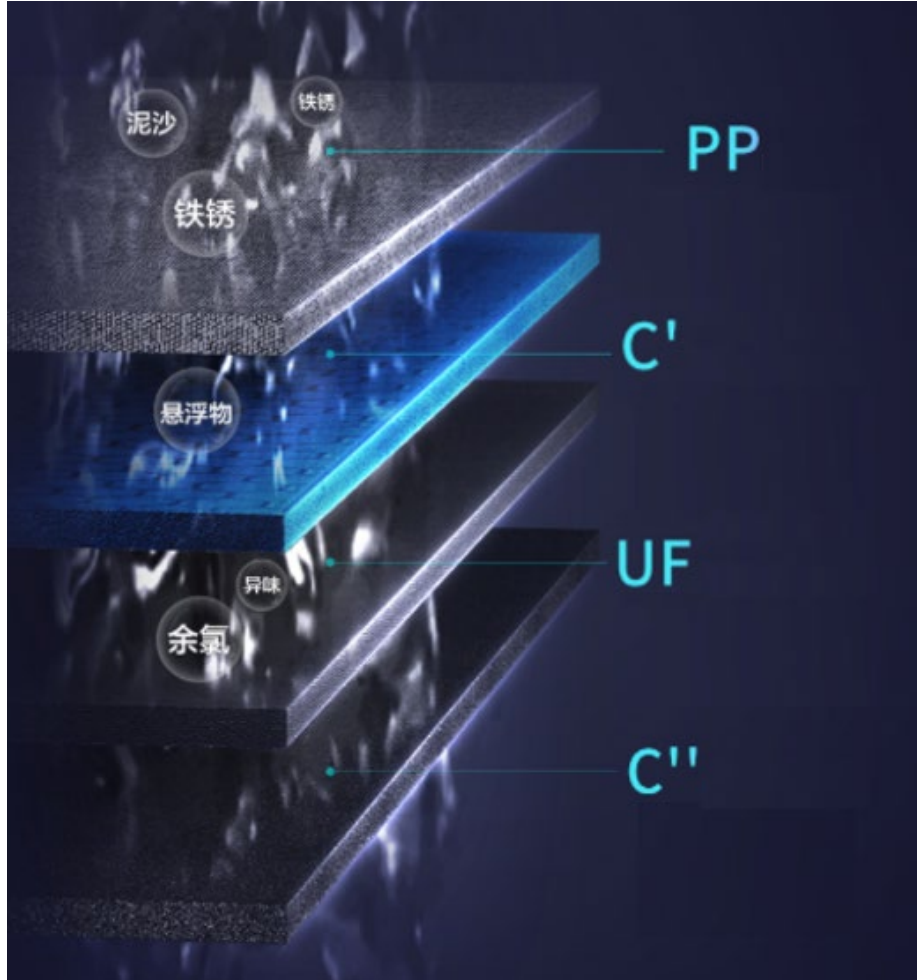

- **PP:** Reduce the normal dust, particulates, sediment, rust, sand.
- **Pre carbon:** Reduce the Odor, Chlorine, organism, smaller particulates.
- **UF:** Reduce Bacteria, colloid, Macromolecular organics.
- **Post carbon:** Provide better taste water.

Easy to change filter design



Three step to replace filters



1. Unfold the buckle, pull out the filter
2. Put new filter back in position
3. Lock the buckle again

Quite while working

No waste water


1. There was no pump & electricity needed while working, no annoying noise
2. The filtration was strived by the municipal water pressure, 0.1 micron, no waste water been produced.

Suggested water pressure: 0.1-0.4Mpa




Integrated water-route system

Integrated water-route system reduce 80% connectors, natural and safe. prevent water Leakage for your house.

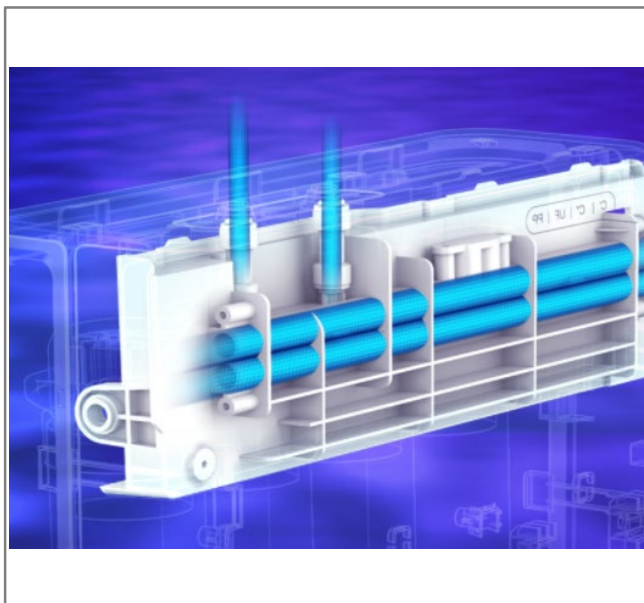

VS

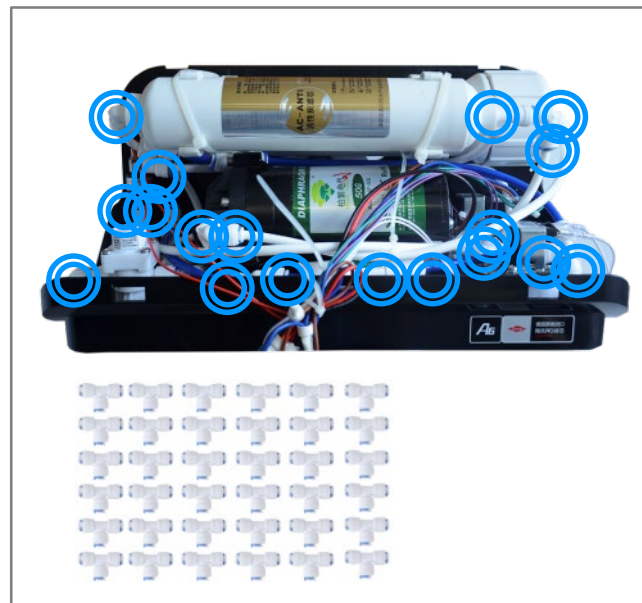

- A1 has less than **10 connectors**, more stable.

- Normal one, more than 30 connectors, inserted by hand, **30 possibilities** of leakage !

Big flow rate, quick to fill your glass

1.2L/min large water flow fills a cup of 200ml purified water in 10s, satisfying you quickly.



Slim size



- Super slim design will be very convenient for your daily life,
- especially for a small kitchen , it can save a lot of space.
- Direct flow without pressure tank.



Specification



Water Purifier	Midea model	MU151-4
General Information 基本信息	Power Supply Voltage & Frequency (V/Hz)	/
	Power Consumption	/
	Pureified Water Output (L/Min)	1.2L/min
Filter Information 滤芯信息	First Stage Filter & Life Time	PP 3600L
	Second Stage Filter & Life Time	C 3600L
	Third Stage Filter & Life Time	UF 5400L
	Forth Stage Filter & Life Time	C" 3600L
Applicable Range 适用范围	Pouvoir Hydrogène--PH 酸碱度	6.5~8.5
	Applicable Environment 适用环境	4~38℃
	Applicable Water Pressure 适用水压	0.1~0.4 Mpa
	Feed Water Temperature 适用水温	5~45℃
	Applicable Feed Water 适用水质 GB5749-2006	Municipal water
Purification Performance 过滤效果	particular removable颗粒去除	0.1~0.01μm
	Smell/Taste 臭和味	NO Smell & Taste
	Visible object 可见杂质	No Visible object to naked eyes
	Chlorine Reduction 余氯去除率	≥90%
	Colon Bacillus	≥99.99%
	Lead、Virus and so on	/
Packaging information 包装信息	Product Dimensions (mm)	363*120*342
	Packing Dimensions (mm)	432*245*475
	N.W. (kg)	3.1
	G.W. (kg)	4.3
Loading Capacity 装柜数	Container Loading Qty. (20'GP/40'GP/40'HQ)	600/1120/1360