



# JL1645T-C

TABLE TOP WATER PURIFIER

# JL1645T-C

## PRODUCT DESIGN



# Noti-Fine

## TIMELY FILTER REPLACEMENT NOTIFIED, PURITY SUSTAINED

Clearly aware of your filters' lifespan and get timely notified of necessary filter replacement, to sustain the optimum purification performance, always ensuring quality in every drop and smoothing your drinking experience.



Filter Introduction of Each Stage



Visible Filter Lifespan on Your Smart Device



# Mi-Report

## ACQUIRE A HEALTHY HYDRATION HABIT



Get to know your water intake by viewing your Water Consumption Reports produced on a daily, weekly, monthly and yearly basis, simply on your smart device. Believe it or not, you will get encouraged by the figures and consciously try to develop a healthier water drinking habit, and we are with you on this journey to a good hydration.



Real-Time & Periodic Water Consumption Report



Learn Your Water Intake

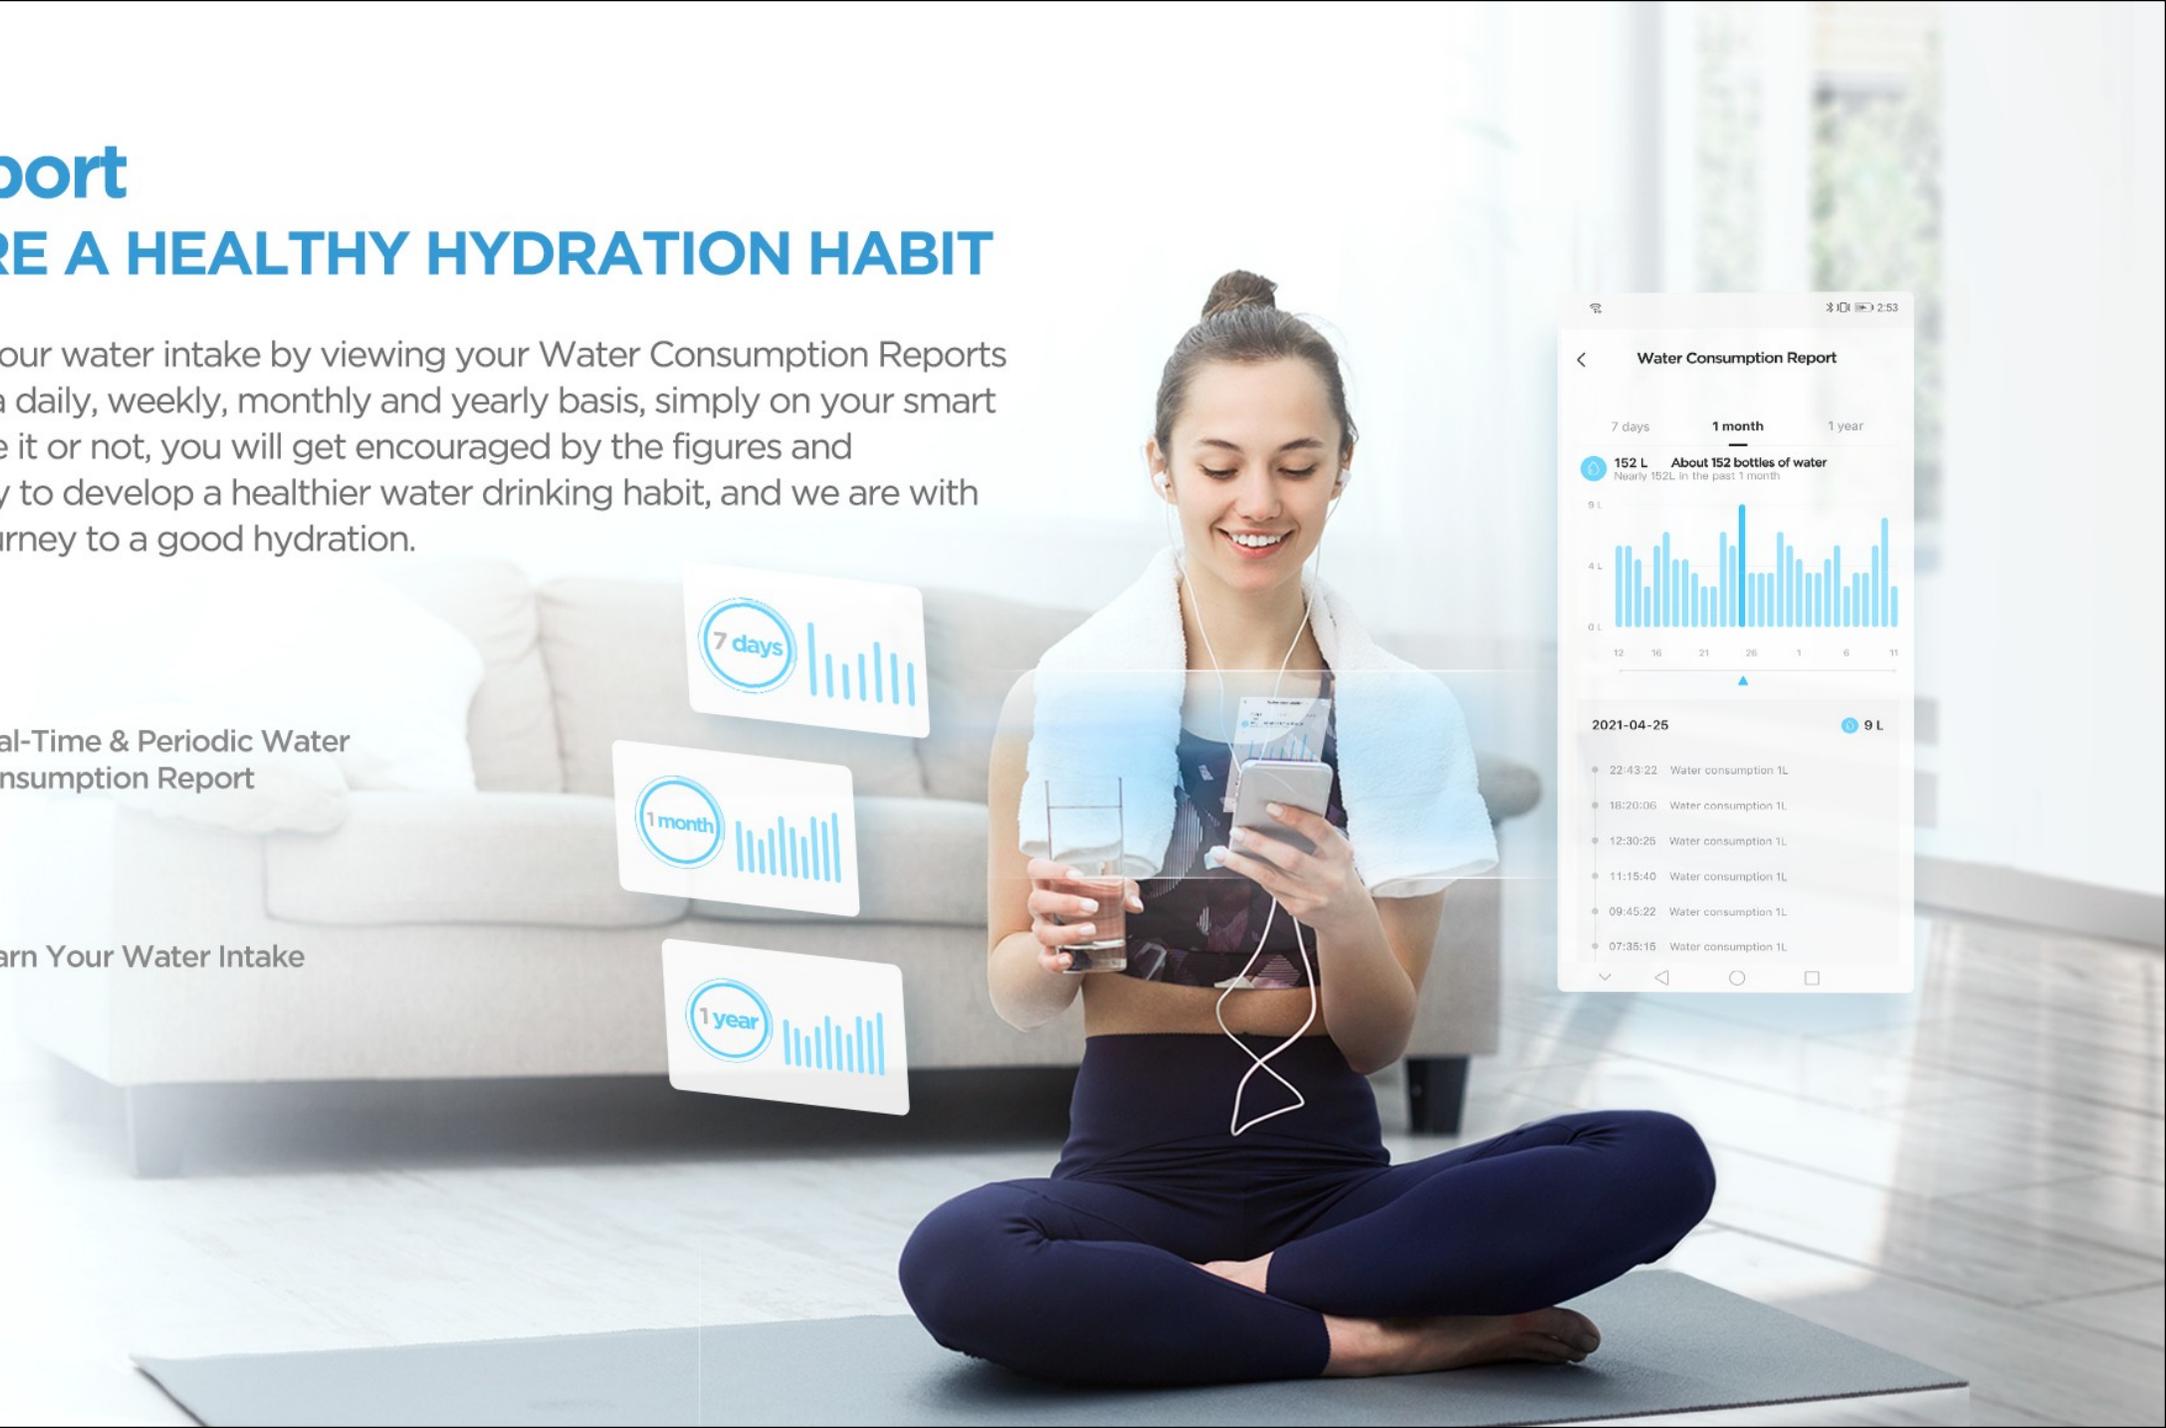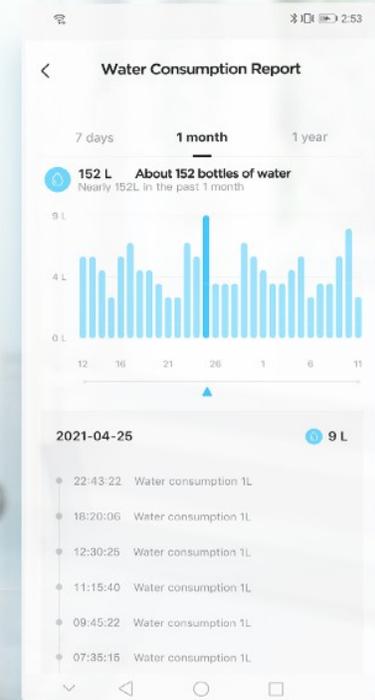


# FREESTANDING WATER PURIFIER


## Post UV-sterilization :

### Post-UV Sterilization

Post UV, kill bacteria just when you drink.  
Microbes removal rate  $\geq 99\%$

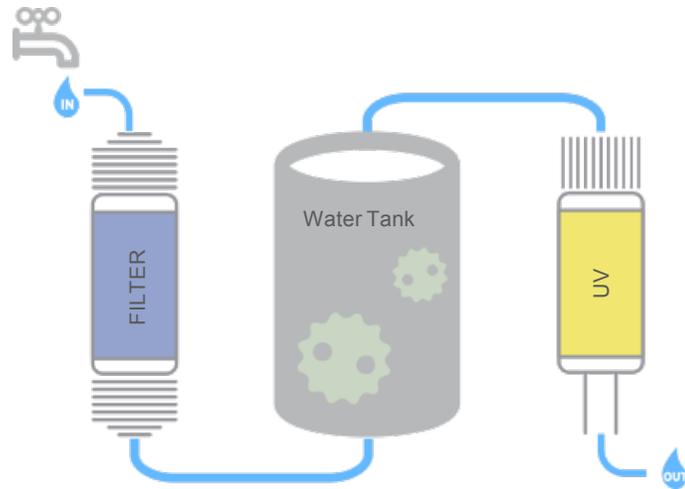

Bacterial grow in the water tank

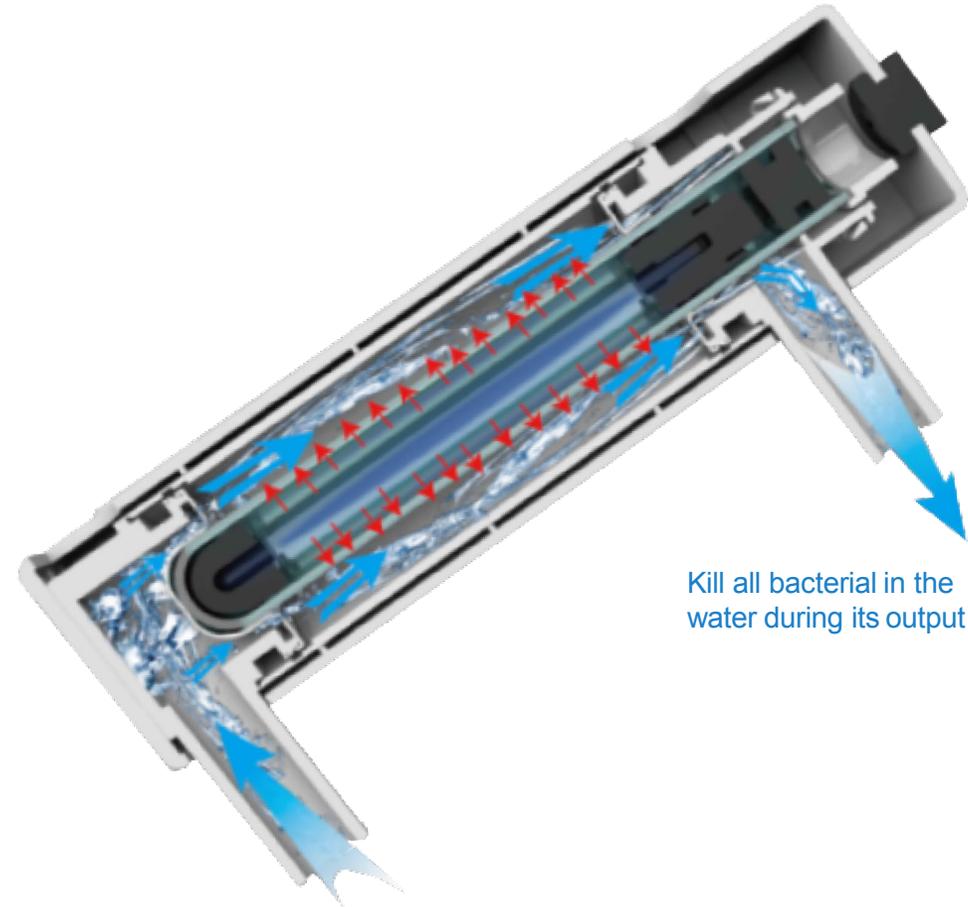


Kill all bacterial in the water during its output

# TABLE TOP WATER PURIFIER

## JL1645T-CG

Features :

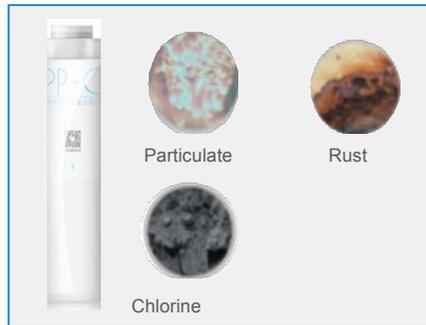

PP & Carbon filter



UF filter

- 1. 3 Temperature Selection
- 2. Filter life time reminder
- 3. Post UV Sterilize water just before you drink , **Absolutely Zero Bacteria**
- 4. **ECO Mode** automatically power off the heating system at night by SMART detector. Save 30% energy
- 5. **Fixed water volume** function. Set your hands free
- 6. One-touch filter. Easy to replace
- 7. PP & Carbon filter reduces odor, chlorine , smell
- 8. **UF filter reduce Colloid, Organism , bacteria**

1 ECO light sensor

2 ECO button

# JL1645T-CG Product Specification:

Product Color-颜色	White /Black Color
Voltage	220-240V~/ 50/60Hz 115V/60Hz
Rated power(W)	555W
Working environment	4°C-40°C , humidity≤90%
Inlet water	Municipal water
Inlet water pressure	0.1 ~ 0.4 Mpa
Faucet Quantity	1
The flow out control	Solenoid valve
Volume selection button	Touch selection volume button and pressure button get set volume water.
Faucet water flow	1.2L/min(depends on the water pressure)
Outer water	Ambient/Cold /Hot
Cooling system	compressor
Cooling Capacity(1t/hr) - 制冷能力	≥3L/H ≤10°C
Cold Water Tank Capacity(1t) - 冷罐容积	1.2L
Heating Capacity(1t/hr) - 加热能力	4L/H ≥85°C
Hot Water Tank Capacity(1t) - 热胆容积	0.8L
Ambient water tank	None
Filtration system	PP & CB +UF
Filtration class	0.01µm

Filter structure	Quick connector
Filter lifetime	PP & CB Filter 3600L UF Filter 5400L
Filter life indication	Base one the user time and volume consumed
Filter size	KSM6
UV lamp	YES
Product Dimensions ( mm ) 产品尺寸	435(D) * 425 ( H ) * 260(W)
Packing Dimensions ( mm ) 包装尺寸	514(D) * 510 ( H ) * 322(W)
N.W. ( kg ) 净重	14
G.W. ( kg ) 毛重	15
-	
Certificate	CBICEUL