

Midea
Z80

**MORE SUITABLE
FOR COMMERCIAL
LOCATION**




Z80

More Suitable for Commercial Location



- 1、 3 water temperature options: Hot & Warm & Cold water.
- 2、 Full-plate touch panel design, elegant and beautiful.
- 3、 Built-in UV-LED light in the water tank, inhibit bacteria growth and ensure the inner hygiene.
- 4、 Large screen display, check working status at a glance. (heating /cooling /filtrating /filter lifetime/UV)
- 5、 Large drip tray, high dispensing area, more convenient for water dispensing.

TOUCH CONTROL

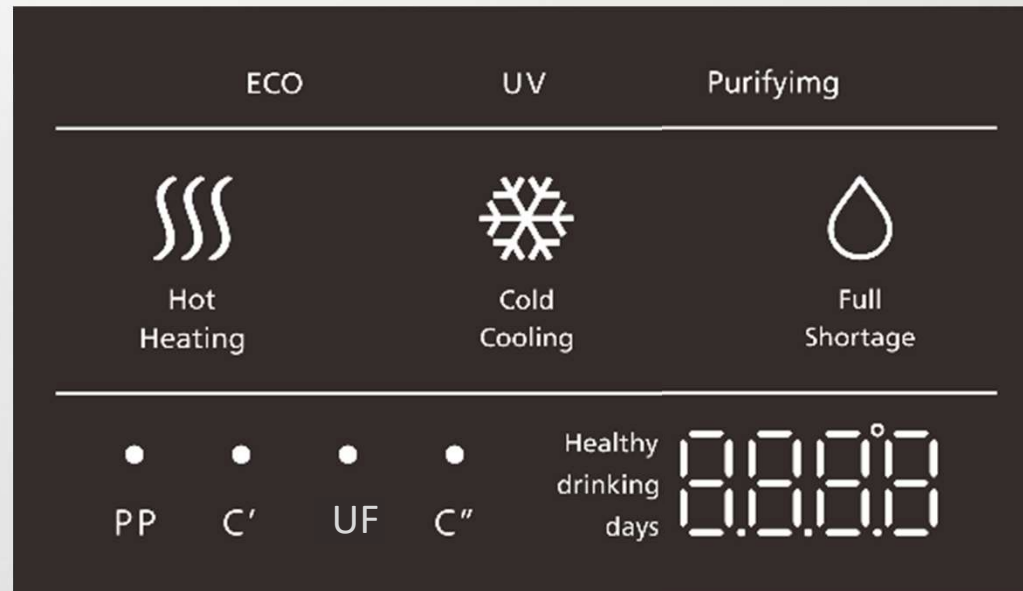

Rental days reminder

Working status are displayed on the screen :
heating /cooling /filtrating /filter lifetime/UV



3 Water Temperature Options:

Three water temperature options: hot/cold/ambient, perfect temperature to make coffee, tea and cold summer drinks.



Make life more hygienic

Touchless Control

Market demand : **Public places**



Office Hospital School

How to control?


1. Keep your hand 1.5cm to 10cm directly above the right sensor to take cold water.
2. Keep your hand 1.5cm to 10cm directly above the left sensor to take ambient water.





Water tank with built-in UV-LED light, inhibit bacteria growth and ensure the inner hygiene.



UV-LED

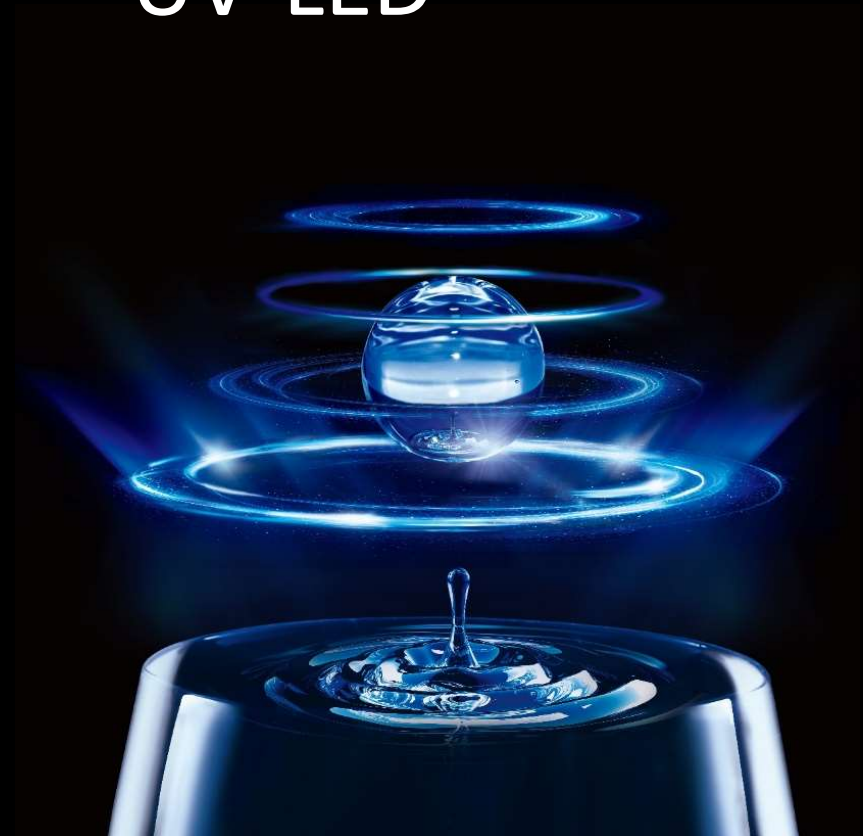

GOOD QUALITY WATER IS PRESENTED IN A GOOD FILTER LAYER

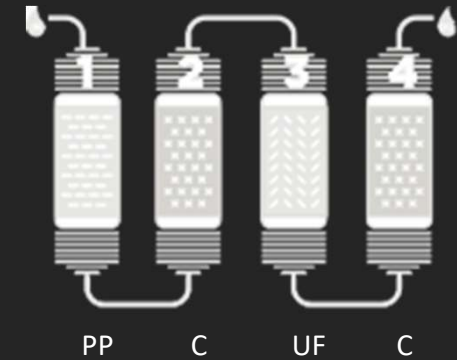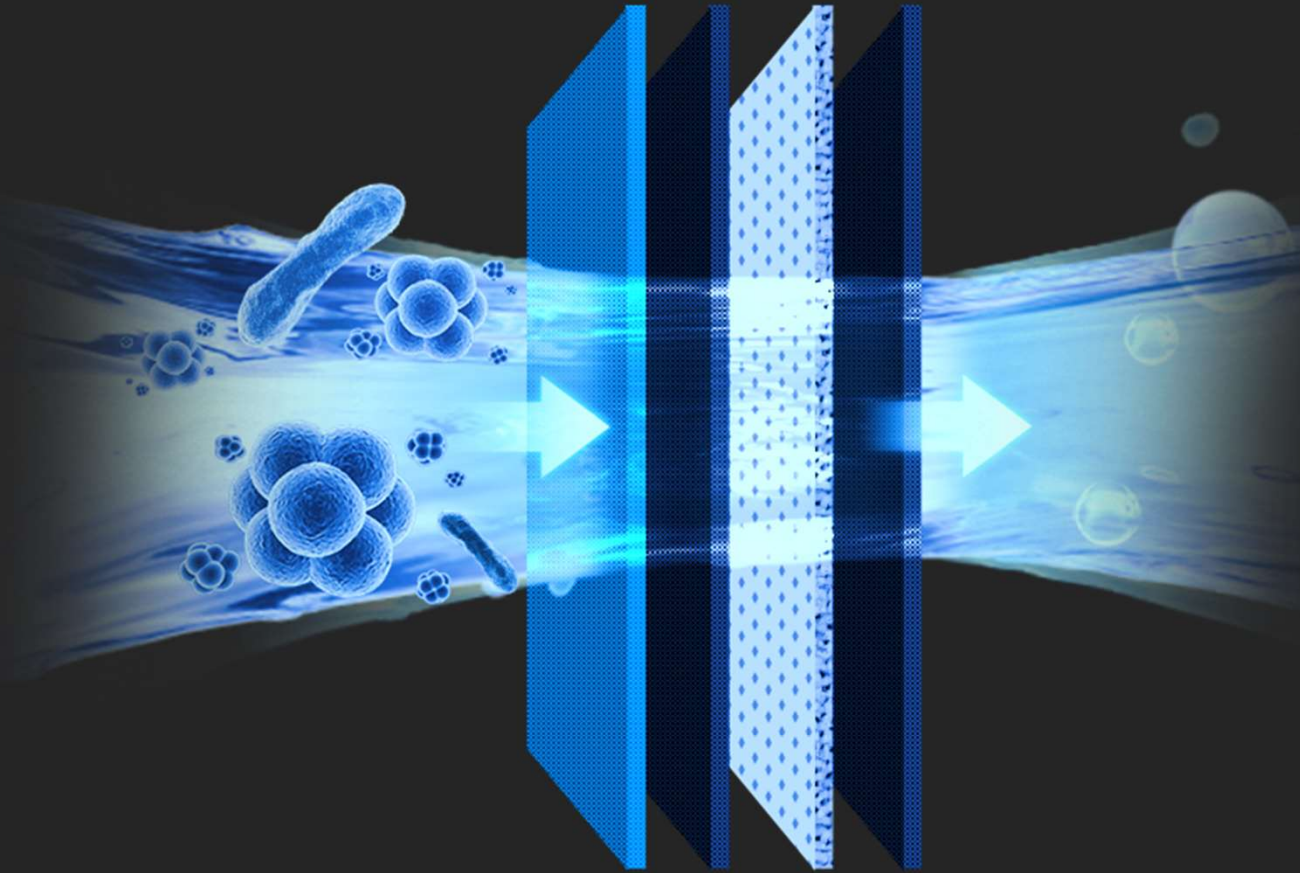

Remove bacteria, large particles, cysts, chlorine, odor etc., and further improve the taste.



One –touch filter : change the filter in seconds

Large capacity water tank

Large capacity water tank, meet the drinking needs of commercial places.

10L

Ambient tank

4.2L

Cold tank

1.8L

Hot Tank

Cooling Capacity

4L/h

Heating Capacity

7.5L/h



Cooling capacity is greatly improved



Midea 4L

VS



Others 2L



Z80

More Suitable for Commercial Location

Leakage protection :

The latest leakage protection device, to ensure the safety in commercial places.





Product Color-颜色	White Color
Refrigerant	R600a
Voltage	220-240V~/ 50Hz
Rated power(W)	994W
Working environment	4-38°C; 60%RH
Inlet water	Municipal water
Inlet water pressure	0.1~0.4 Mpa
Faucet Quantity	1
Water flow	≥1.2L/min(depends on the inlet water pressure)
Outer water	Ambient/Cold /Hot
Cooling method	Compressor
Cooling Capacity(1t/hr) - 制冷能力	4L/H; ≤10°C
Cold Water Tank Capacity(1t) - 冷罐容积	4.2L
Heating Capacity(1t/hr) - 加热能力	7.5L/H; ≥85°C
Hot Water Tank Capacity(1t) - 热胆容积	1.8L
Ambient water tank	None

Filtration system	First stage: PP Filter Second Stage: Pre Active Carbon Filter Third Stage: UF Filter Fourth Stage: Post Active Carbon Filter
Filter lifetime	3600L
Filter life indication	Base one the user time and volume consumed
Filter size	F1
UV lamp	UV-LED in the water tank
Product Dimensions (mm) 产品尺寸	360*460*1400
Packing Dimensions (mm) 包装尺寸	480*505*1490
N.W. (kg) 净重	31.5
G.W. (kg) 毛重	34.5
Container Loading Qty. (20'/40'GP/40'HQ) - 集装箱装箱量	48/96/96
Certificate	CE/EU